



PBXgateway™

Extending the feature-rich corporate PBX to branch offices, teleworkers, remote call center agents and mobile workers over traditional and next-generation networks

Distributed Voice Solutions For The Extended Enterprise

The PBXgateway is a high performance unit that resides at the corporate voice system and terminates up to twelve remote users from any combination of MCK's Remote Voice Protocol over IP (RVPoIP)™ products including:

- EXTender™ 6000 for Branch Offices
- EXTender 4000 for IP
- EXTender 3200 for IDSL
- Mobile EXTender¹

The PBXgateway also operates in serial Remote Voice Protocol (RVP)™ mode over traditional networks.

MCK's Distributed Voice Solutions affordably and seamlessly extend the features and functionality of existing corporate voice systems to branch offices, remote call center agents, telecommuters and mobile workers across traditional and next-generation networks. Our solutions provide businesses with a managed migration path to the telephony applications of the future, enabling them to leverage their investments in existing voice systems, access new applications being offered by next generation service providers, and maintain a single, unified voice system for their increasingly distributed workforces.



PRODUCT OVERVIEW

With MCK's PBXgateway, your remote workers can now enjoy all the features of your corporate PBX, wherever they are located. That's because the PBXgateway extends all the capabilities of your PBX to remote employees over circuit or packet networks.

The PBXgateway can be configured to operate in either a managed IP packet network or a point-to-point synchronous WAN environment over traditional networks. In a traditional WAN environment, up to two EXTender 6000s can connect into the PBXgateway running MCK's Remote Voice Protocol (RVP). RVP relies on HDLC encapsulation over a serial port to transmit voice signals.

REMOTE VOICE PROTOCOL over IP (RVPoIP)

To extend remote voice capability over a managed IP network, simply install a PBXgateway at your corporate site and then choose a combination of remote IP client units to meet your needs. Up to 12 users can be terminated at the PBXgateway. Branch offices, teleworkers and remote call center agents can be connected using standard IP network termination devices such as IP routers, DSL or cable modems and cell phones.

As long as the IP network can be managed to ensure sufficient bandwidth and Quality of Service (QoS), MCK's solution will deliver high quality voice.

You can now extend full corporate PBX capabilities over IP networks, making voice and data convergence a reality.

MCK's Remote Voice Protocol converts digital voice and phone signaling into highly efficient data packets. Sophisticated software features include a G.165-compliant echo canceller enhanced with extremely robust double-talk performance, manufacturer-provided PBX protocols and a range of industry standard voice compression options.

MANAGEMENT FEATURES

MCK's business voice solutions have been designed for operational simplicity. All of the system's configuration, management, and administrative and diagnostic functions may be managed from the PBXgateway using a serial connection, Telnet or an inband network connection from a remote client. This flexibility allows you to maximize your company's system administration resources and lower operating costs.

PBXgateway™

PBXgateway

KEY BENEFITS

- Flexibility**
 Mix and match client modules and Mobile EXTenders up to a total of 12 users. This gateway supports up to two EXTender 6000 for Branch Offices on serial RVP mode.

 Configure the PBXgateway to operate in managed IP network (Layer 3) or in traditional circuit switched and frame relay (Layer 2) environments.

- Increased Productivity**
 Remote employees are able to use the same full-featured digital sets and have access to corporate PBX functions, like voice mail, call accounting systems, unified messaging and ACD systems.


- Network Efficiency**
 A choice of network topologies and variable compression rates minimizes communications cost.

Leverage IP data network infrastructure for both voice and data traffic.



FRONT VIEW

DB-9 console port for easy system management.

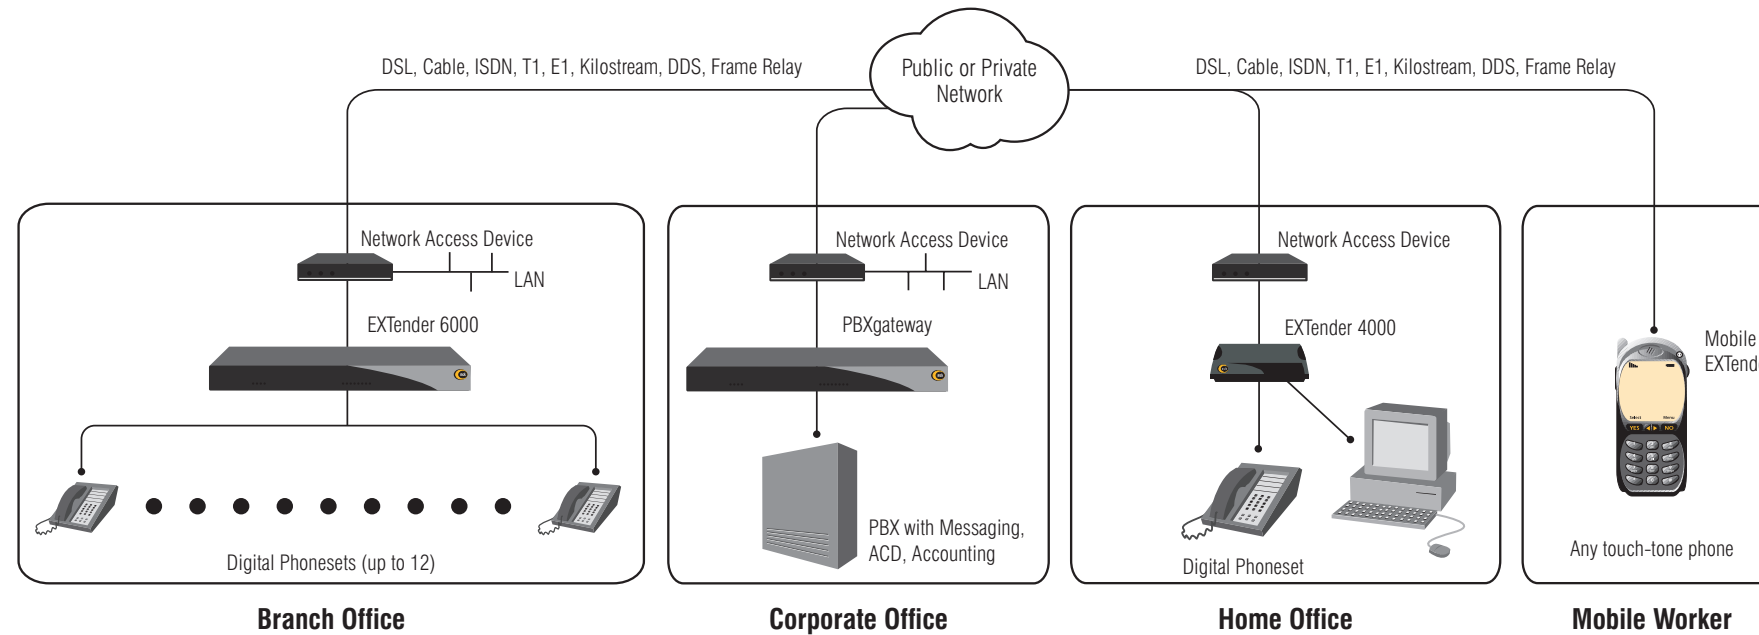

- Ease-of-Use**
 Simple installation process.

 Easy-to-use configuration tools enable virtual management of remote users from a central location.
- Investment Protection**
 MCK is committed to providing you with flexible product solutions for today's, and tomorrow's, needs.

KEY FEATURES

- Synchronous transmission
- Support for asynchronous TA adapters
- Encrypted username and password allocated by system administrator to each port
- Network down recovery
- Call suspend mode on ISDN lines with Asynch TA
- Support for IP Precedence and DiffServ QoS mechanisms

PBX/KTS COMPATIBILITY

- Avaya: DEFINITY® ECS (release 3 or later)
- IWATSU: ADIX APS
- NEC: NEAX2000™, NEAX2400™, NEAX Express and Electra Elite
- Nortel: Meridian® and Norstar®
- Toshiba: Strata DK

GENERAL SET-UP GUIDELINES

- The PBXgateway is deployed within 500 feet from the PBX/KTS at the corporate office
- The PBXgateway can be configured to run on IP transport or traditional circuit switched and frame relay networks
- When running RVPoIP, the gateway connects to a network access device via the 10Base-T LAN port

- When running serial RVP, the gateway connects to a network access device via the DB-25 WAN port(s) and up to two EXTender 6000s can be connected to the gateway
- The PBXgateway running software release 2.0 supports the Mobile EXTender application (DEFINITY only)
- EXTender 6000 is the remote client that supports serial RVP in point-to-point mode
- Remote clients that support RVPoIP are the EXTenders 6000, 4000 and 3200
- The PBXgateway can support both a serial RVP client and RVPoIP clients simultaneously, up to 12 ports total
- Network access device should be configured to provide Quality of Service* (QoS) support in order to guarantee voice service quality
- The PBXgateway is available in 8-port and 12-port configurations
- Minimal setup programming required, accomplished via Telnet, HTML, RS-232 console interface, or inband RVP

SOFTWARE SUPPORT

- TCP/IP protocol support for IP traffic and management access
- RVPoIP uses UDP/IP protocol for voice transmission
- Serial RVP uses HDLC encapsulation for voice transmission
- Management and Utilities – Telnet, inband RVP, RS-232 console interface, SNMP, HTML, phone display (limited features)
- Wind River's VxWorks™ operating system
- Software upgradeable via LAN FTP, RS-232 serial port to PC, or inband connection between the PBXgateway and the EXTender 6000

ONLINE RESOURCES

- List of recommended network access devices available at www.mck.com in the Products & Solutions section



BACK VIEW

CONNECTORS INCLUDED IN BACKPLANE OF UNIT:

- Internal power supply
- One Amphenol connector for 50-pin RJ-21 cable for interface with digital telephone sets
- Two DB-25 WAN ports for serial RVP connection. Redundant interfaces include V.35, RS-232 or RS-530
- One RJ-45 10/Base-T Ethernet for RVPoIP and Telnet/HTML system management

QUICK REFERENCE CHART

VOICE PROTOCOLS

- Choice of voice compression standards:
 - G.729A (8 Kbps)
 - G.726 (24 or 32 Kbps ADPCM)
 - G.711 (64 Kbps PCM)
- G.165 echo canceller software, with MCK proprietary double-talk detection enhancement
- MCK Remote Voice Protocol (RVP)
- MCK Remote Voice Protocol over IP (RVPoIP)
- IP voice packets are tagged for network traffic prioritization using IP Precedence or DiffServ

HARDWARE

Form Factor: Low profile, 1U rack mountable unit

Other Components:

- Motorola 68MH360-33 processor
- 4 MB Flash Memory, 512 Kb ROM, 4 MB DRAM
- DSP Analog Devices 2187 (52 MIPS)

POWER SUPPLY

- Internal
- Universal auto ranging power supply
- Line voltage: 100 – 240 V
- Frequency: 47 – 63 Hz
- Maximum power consumption: 75 Watts

DIMENSIONS

- Size: 17" x 8" x 1½"
(432mm x 203mm x 44mm)
- Weight: 6.5 lbs (3 kg)

PBXgateway	PBXgateway II
Available in 8- and 12-port configurations	Available only in a 24-port configuration
Supports the Mobile EXTender and the EXTender 6000, 4000 and 3200	Supports all of MCK's EXTenders including the Mobile EXTender
Equipped with one DB-9 console port	Equipped with two DB-9 console ports
Outfitted with one 10Base-T LAN port	Outfitted with two 10/100Base-T LAN ports

OPERATING ENVIRONMENT

- Temperature: 32° – 130° F (0° – 55° C)
- Relative humidity: 5 to 95% (non-condensing)

REGULATORY APPROVALS

- FCC Part 15 Class B and FCC Part 68, NRTL/CSA and CE Mark

WARRANTY

- One-year limited warranty for parts and labor

CISCO SYSTEMS



Service Provider
Solution Partner

¹Supported by PBXgateway running software release 2.0 or later.



Product specifications subject to change without notice.

MCK, the MCK logo, EXTender, PBXgateway, RVP and RVPoIP are trademarks of MCK Communications, Inc. Other brand and product names referenced herein are trademarks of their respective holders.

*MCK's IP-based products utilize Voice over IP (VoIP) technology to deliver remote voice solutions. The voice quality of these solutions is dependent on variables such as available bandwidth, network latency and quality of service (QoS) initiatives, all of which are controlled by the network and Internet service providers. Because these variables are not in MCK's control, it cannot guarantee the performance of the users IP-based remote voice solution.

© 2001 MCK Communications, Inc.
03-PBXG-0501

Distributed in Australia by:
Answer Plus Communications (Aust) Pty Ltd
P.O. Box 1025
BAULKHAM HILLS NSW 1755
Australia
Tel: 1300 368 506
Fax: 1300 368 503
Email: sales@apcomms.com.au
www.apcomms.com.au

Appointed Agent:

